




TYPICAL SECTION

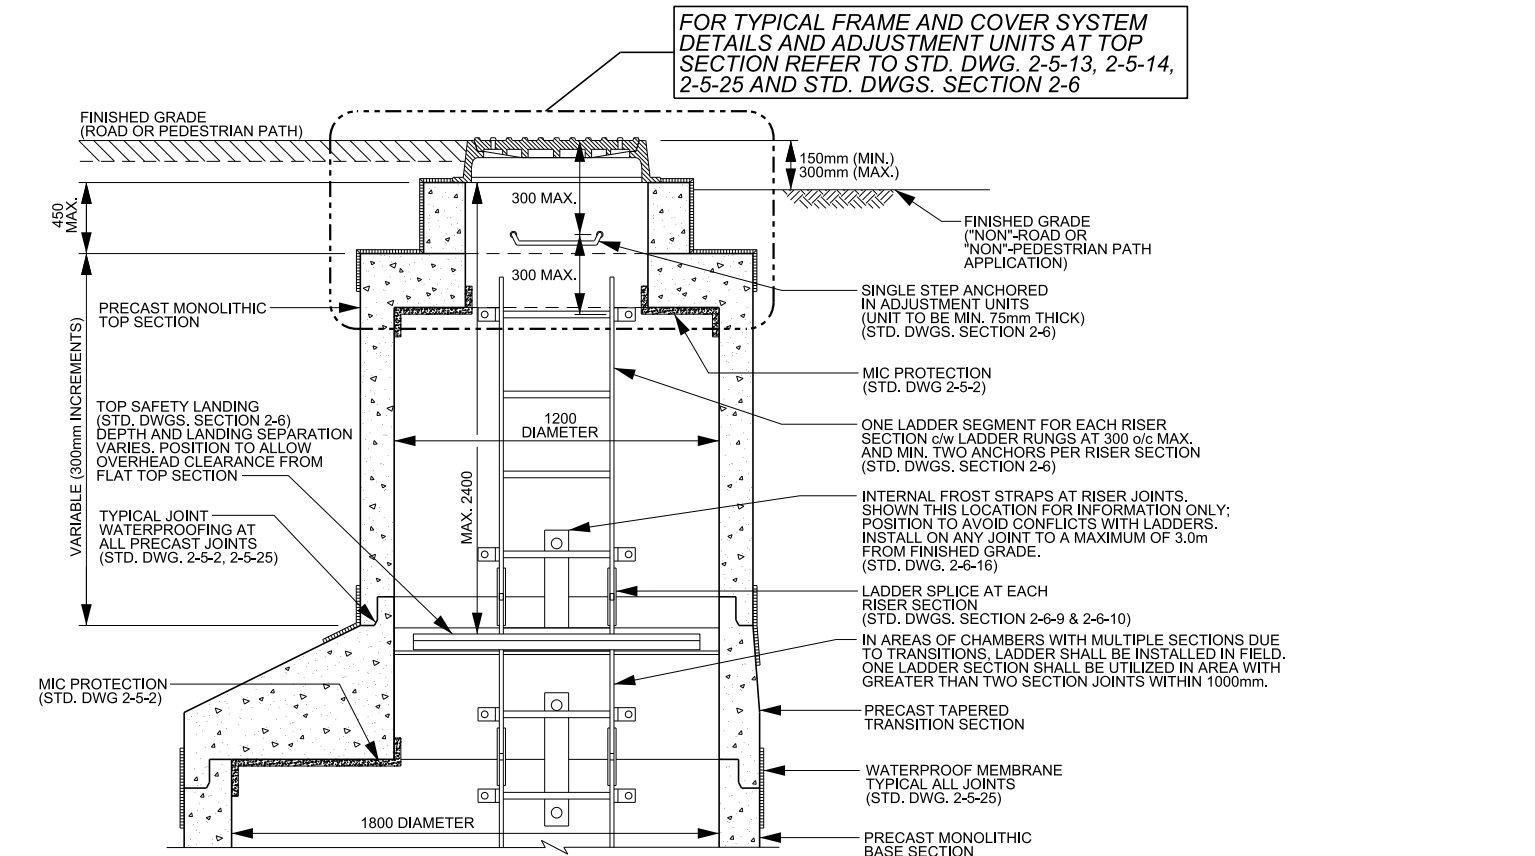

OPTIONAL PRECAST FLAT CAP (MONOLITHIC TOP SECTION) TYPICAL SECTION

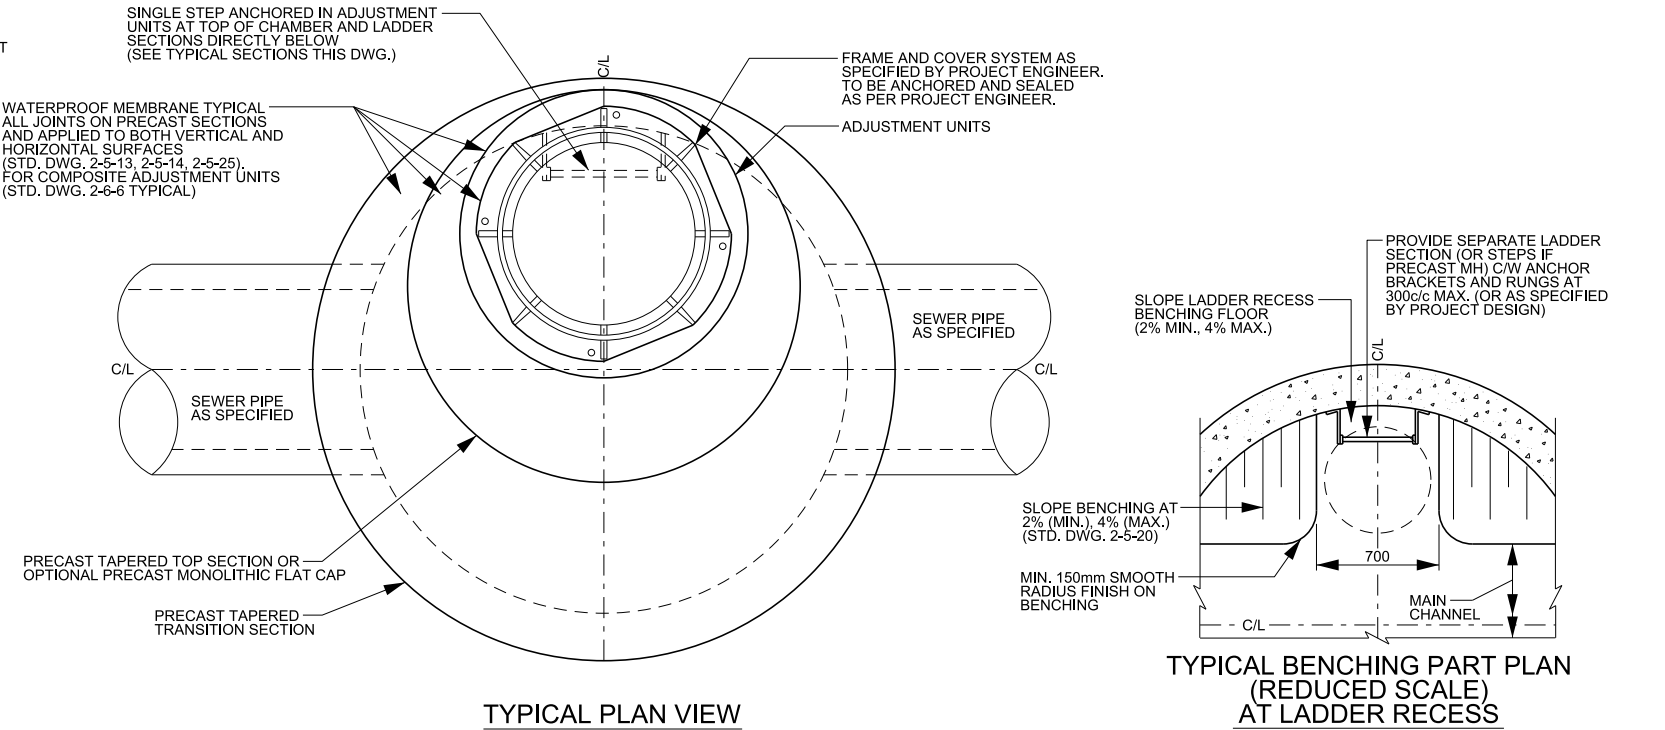


TYPICAL PLAN VIEW

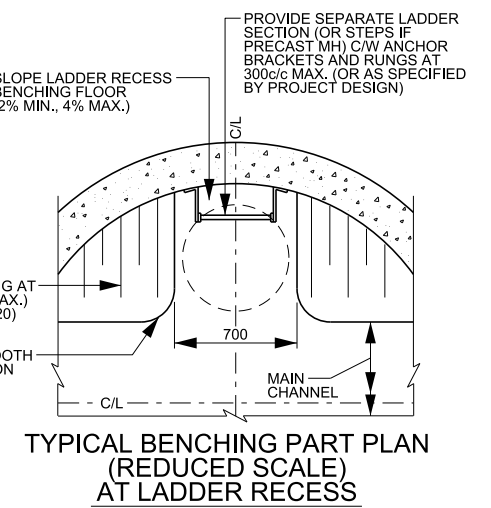

TYPICAL BENCHING PART PLAN (REDUCED SCALE) AT LADDER RECESS

- NOTE**
1. REFER TO STANDARD DRAWING 2-5-1 FOR GENERAL NOTES PERTAINING TO PRECAST MAINTENANCE HOLES.
 2. REFER TO STANDARD DRAWING 2-5-2 FOR TYPICAL INSTALLATION OPTIONS AND REQUIREMENTS..
 3. FOR PIPE TO MAINTENANCE HOLE SIZING REFERENCE STD. DWG. 2-5-21.
 4. FOR PIPE SIZE LESS THAN 600mmØ NON PRESSURE DESIGN IS PERMITTED. PIPE SIZES EQUAL TO OR GREATER THAN 600mmØ SHALL BE DESIGNED TO PRESSURE.
 5. FOR TAPERED TOP SECTIONS THE LADDER SHALL ALWAYS BE INSTALLED ON THE SIDE WITH VERTICAL WALL.
 6. FOR PIPES GREATER THAN 600mm DIAMETER LADDER RECESS SHALL BE PROVIDED (STD. DWG. 2-5-10, 2-5-11).

| | | | | |
|--|--|-------------------------|-------------------------------|---|
|  | PUBLIC WORKS STANDARD DRAWING | | REV. DATE: AUGUST 2020 | |
| | | | REVISION NUMBER: 2 | FOR REVISION TRACKING REFER TO STD. DWG. 2-0-2 |
| | | APPROVED BY | DRAWN BY | |
| | | A.P. | AINLEY GROUP | |
| | | STD. DWG. NUMBER | SCALE | |
| | | 2-5-5 | N.T.S. | |
| NEW SANITARY SEWER CONSTRUCTION TYPICAL 1800mm DIAMETER PRECAST CIRCULAR MAINTENANCE HOLE DETAILS | | | | |